




REVISION		RECORD	
REV.	CONTENT	MOD.	DATE
△	初版发行		

NOTES:

1. Voltage Rating: 300V, Current Rating: 15A
2. PITCH: 7.62mm
3. Insulation Withstands Voltage: AC2500V/min
4. Insulation Resistance: 500MΩ or more at DC500V
5. Using Temperature Range: -40℃ - +130℃
6. Suitable Electric Wire: AWG 22-14
7. Screw Torque Value: N3/0.5 N.m

技术要求:

1. 额定电压: 300V, 额定电流: 15A
2. 间距: 7.62mm
3. 耐电压值: AC 2500V/min
4. 绝缘电阻500兆欧
5. 使用条件: -40℃ - +130℃
6. 适用线规: AWG 22-14
7. 螺丝扭力: N3/0.5 N.m

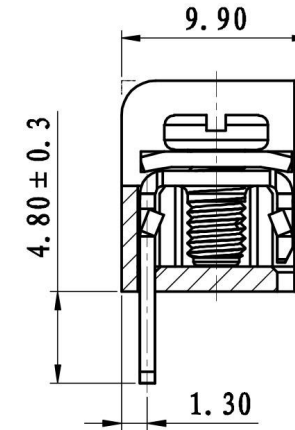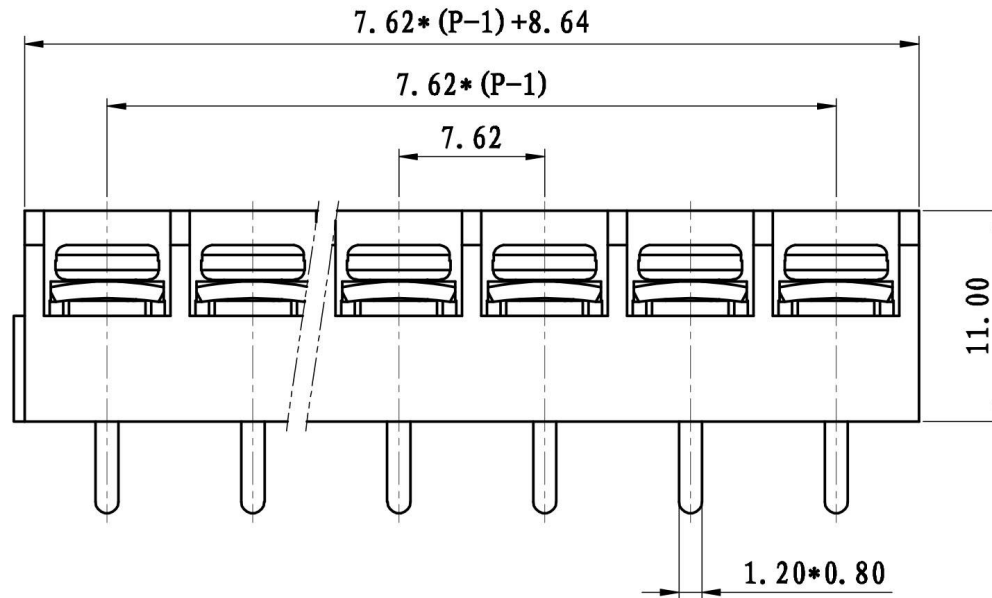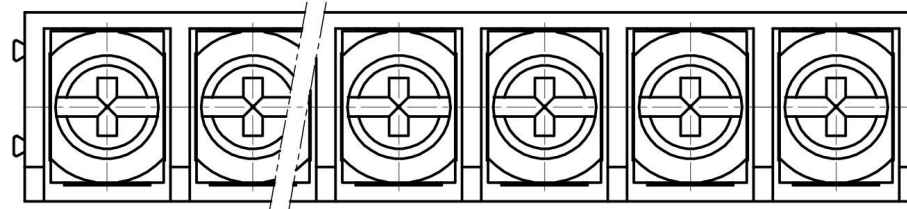

TOLERANCES EXCEPT AS NOTED

	linear dimension				fillet	chamfer	∠ short angle sid				≡	—	□	//	⊥		
	to	over	over	over			to	to	to	to						to	to
variable range	to 6	over 6 to 30	over 30 to 120	over 120 to 480	all	to 6	to 10	to 10	to 10	to 10	to 10	to 10	to 10	to 10	to 10	to 10	
Tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1'	30'	20'	10'	0.3	0.025	0.06	0.12	0.4

3	LW3-7.62-螺丝	SPFFA305623V	P	碳钢	镀锌
2	LW3-7.62-焊脚	5015B0001AV	P	黄铜	镀锡层
1	LW3-7.62-主体	5015A0YXXAV	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES
DES.	ARKINE	DATE	11-05-10	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				DWG NO.	SP-2-5015001
				REV:	V0
上海联捷电气有限公司 Shanghai Hlinker Electric C.O., Ltd				TITLE	LW3PA-7.62-XP-1Y-00A LW3PA-7.62-成品