

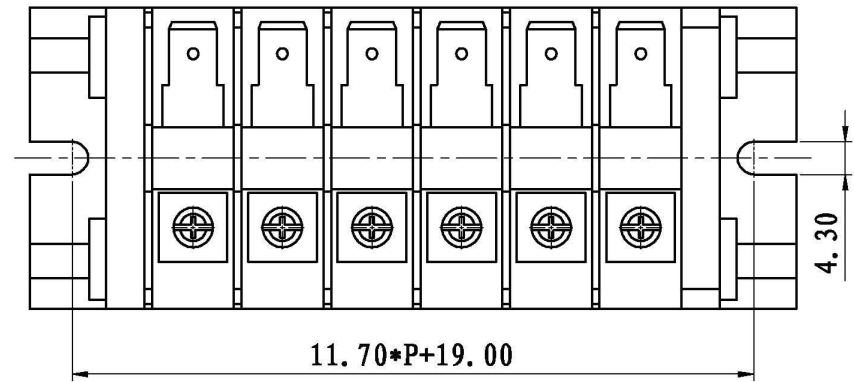


REVISION RECORD			
REV.	CONTENT	MOD.	DATE

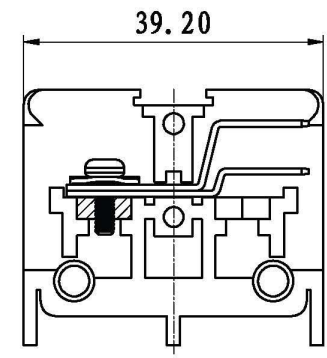

技术要求:
极数: 组装
额定电压: 600V
额定电流: 30A
螺钉类型/扭力: M4/1.2-1.8
绝缘材料类型: PC
阻燃等级: V1
导线截面: 4mm²

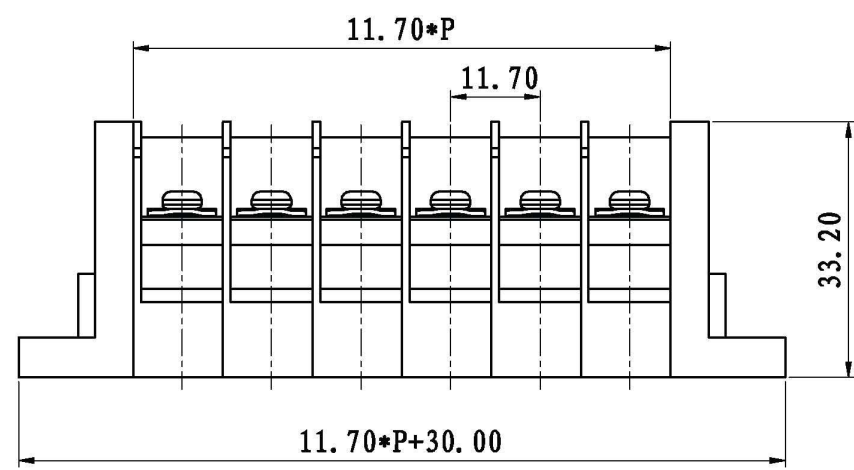

6	M4螺钉	L000400010V	2	铁	镀锌
5	M4外六角螺母	SMD0400010V	P+2	铁	镀锌
4	JX0-30 螺丝	SSD0400090V	P	碳钢	镀锌
3	JX0-66导电件(无缺口)	6038B00010V	P	H62	镀镍
2	JX0-30端板	6038C30XXAV	2	PC	黑色
1	JX0-30A本体	6038A30XXAV	P	PC	黑色

NO.	NAME OF PART	NO. OF PART	QTY	MATERIAL	NOTES
DES.	LDD	DATE	2012/09/07	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1

单位 (mm)	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
总长	53.40	65.10	76.80	88.50	100.20	111.90	123.60	135.30	147.00	158.70	170.40	182.10	193.80	205.50	217.20	228.90	240.60	252.30	264.00


上海联捷电气有限公司
 Shanghai Blinker Electric Co., Ltd.

TITLE: **JX0-C2-XX-130-00A**
 JX0-C2-成品