
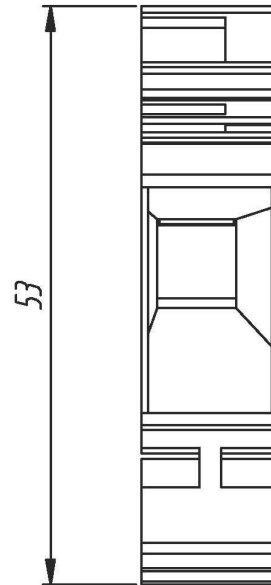
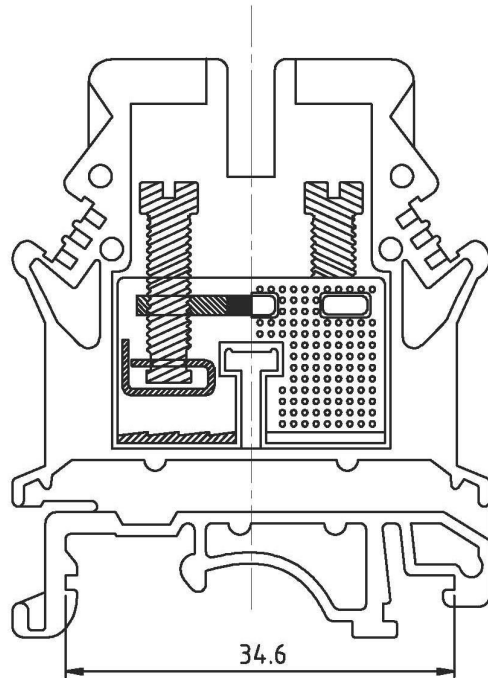


REVISION		RECORD	
REV.	CONTENT	MOD.	DATE
△			

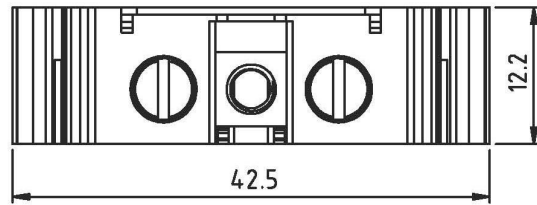

电气性能

电压 800V

电流 101A

刚/柔性导线 2.5-25/4-16mm²

线规AWG 12-4

螺钉类型/扭力 M4/1.5-1.8Nm

绝缘材料类型 PA66

阻燃级别 V0

TOLERANCES EXCEPT AS NOTED

	linear dimension					fillet	chamfer	short angle sid				≡	—	□	//	⊥	
	variable	over	over	over	over			over	over	over	over						
range	to	to	to	to	to	all	to	to	to	to	all	to	to	to	to		
	6	30	120	480			6	10	50	120		5	30	120			
Tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1'	30'	20'	10'	0.3	0.025	0.06	0.12	0.4

NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	DATE	10/04/05	UNITS	MM	THIRD ANGLE PROJECTION
CHK.	DATE		SIZE	A4	of
APP.	DATE		SCALE	1:1	DWG NO.
 上海联捷电气有限公司 Shanghai Blinker Electric C.O.,L'D					TITLE
					UK16N