



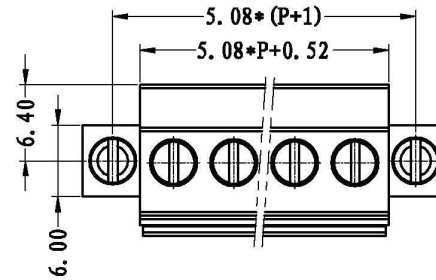


2P-双卡扣

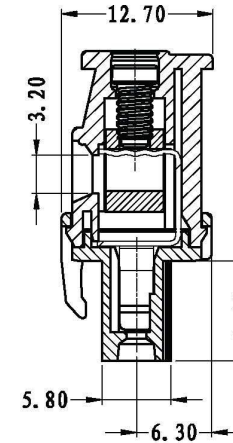

2P-单卡扣

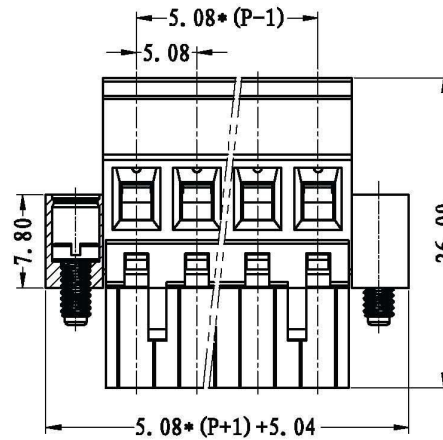

REVISION RECORD

REV.	CONTENT	MOD.	DATE
△1	2P侧勾更改	XLM	11/09/15
△2	盖板容易脱落0.5改为0.7	XLM	11/09/13
△3	卡点移位, 上边下-0.1MM	XLM	12/03/08
△4	改善本体弯曲	LDD	12/08/25

NOTES:

1. Voltage Rating: 300V, Current Rating: 15A
2. PITCH: 5.08mm
3. Insulation Withstand Voltage: AC2500V/min
4. Insulation Resistance: 5MΩ or more at DC1000V
5. Using Temperature Range: -40° C - +105° C
6. Suitable Electric Wire: 3#-12AWG
7. Screw Torque Value: 0.5N.m以上

技术要求:

1. 额定电压: 300V, 额定电流: 15A
2. 间距: 5.08mm
3. 耐电压值: AC 2500V/min
4. 绝缘阻抗: 5兆欧
5. 使用条件: -40° - +105° C
6. 适用线规: 3#-12AWG
7. 螺丝扭力: 0.5N.m以上

	pitch dimension			Nominal dimension					— /
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150	150	0.05/10
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6.	LC1-耳朵螺丝	SPOYA255301V	2	碳钢	三价格钝化彩锌
5.	LC1-5.08-螺丝	SPOYB305503V	P	碳钢	三价格钝化彩锌
4.	LC2-5.08-夹子	1006B0001AV	P	磷青铜	镀镍
3.	LC1-5.08-铜方块	F1A0BLC50831	P	黄铜	镀镍
2.	LC2-5.08-盖子	1006COYXXAV	1	PA66-V0	
1.	LC2M-5.08-主体	1006MOYXXAV	1	PA66-V0	

NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE	2010/10/12	UNITS	MM
CHK.	DATE		SIZE	A4	THIRD ANGLE PROJECTION
APP.	DATE		SCALE	1:1	DWG NO. SP-2-1006003 REV: V4

上海联捷电气有限公司  
Shanghai Blinkor Electric Co

TITLE

LC2AM-5.08-XXP-1Y-00A  
LC2AM-5.08-成品