



| REVISION | | RECORD | |
|----------|---------|--------|------|
| REV. | CONTENT | MOD. | DATE |
| ① | 初版发行 | | |

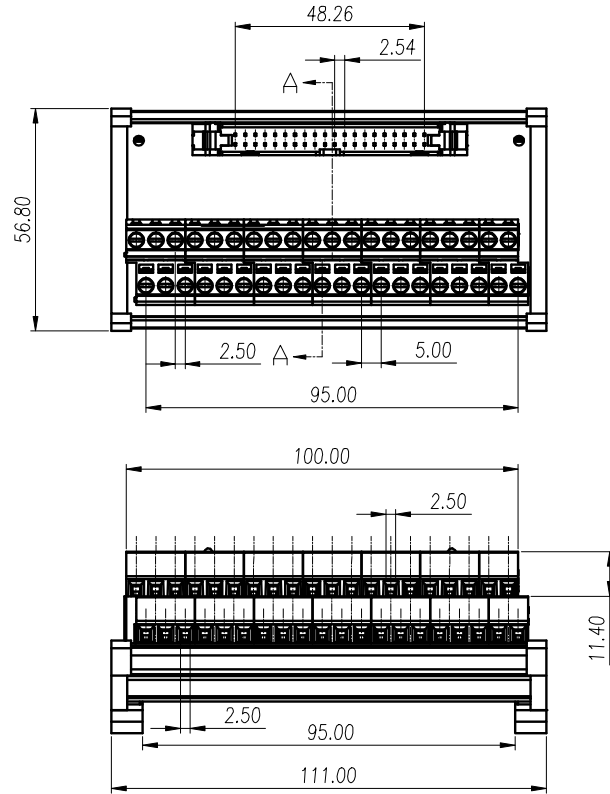

技术要求:
 间距: 5.0mm
 额定电压: 300V
 额定电流: 10A
 耐电压值: AC2500V/min
 绝缘阻抗: 5MΩ/DC500V
 使用条件: -40℃~+105℃
 适用线规: 26~14AWG
 螺丝扭矩: 0.4Nm

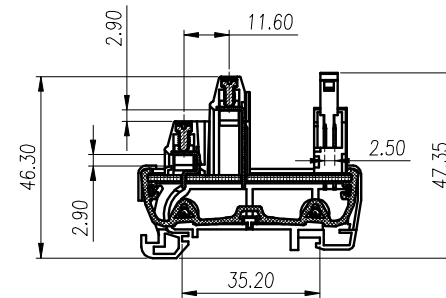

SECTION A-A

| | | | | | |
|---|----------------------|---------------------------|---|------|----|
| 8 | LG500BZL-5, 0-2*3-成品 | LG500BZL-5, 0-2*3-140-00A | 6 | PA66 | |
| 7 | LG500BZL-5, 0-2*2-成品 | LG500BZL-5, 0-2*2-140-00A | 1 | PA66 | |
| 6 | DC2-40P-牛角插座 | 6DC2A300407V | 1 | | |
| 5 | MJC-F40端子横组基板 | 4017A0000AV | 1 | | |
| 4 | M3, 0*12自攻螺丝 | SQZ0A30A203V | 4 | 铁 | 镀锌 |
| 3 | JUM-52-主体 | 6JUMA400013V | 1 | PA66 | 绿色 |
| 2 | JUM-52-右挡板 | 6JUMC400023V | 1 | PA66 | 绿色 |
| 1 | JUM-52-左挡板 | 6JUMC400013V | 1 | PA66 | 绿色 |

| NO. | NAME OF PART | NO. OF PART | QTY | MATERIAL |
|------|--------------|-------------|------------|-----------|
| DES. | ZGC | DATE | 2020/06/13 | UNITS mm |
| CHK. | | DATE | | SIZE A4 |
| APP. | | DATE | | SCALE 1:1 |

| | | |
|------------------------------|---------------|------------------------|
| THIRD ANGLE PROJECTION SHEET | | 1 of 1 |
| DWG NO. | SP-2-GMJC/F40 | REV: V0 |
| TITLE | | MJC-F40 MJC-F40端子横组 |

上海联捷电气有限公司
 Shanghai Elinker Electric CO.,LTD

| | pitch dimension | | | Nominal dimension | | | | | — / |
|----------------|-----------------|--------|---------|-------------------|---------|---------|----------|----------|---------|
| | over 0 | over 6 | over 10 | over 0 | over 30 | over 60 | over 100 | over 150 | |
| variable range | to 6 | to 10 | to 24 | to 30 | to 60 | to 100 | to 150 | | 0.05/10 |
| Tolerance | ±0.1 | ±0.15 | ±0.25 | ±0.2 | ±0.3 | ±0.5 | ±0.7 | ±1.0 | |