


REVISION		RECORD	
REV.	CONTENT	MOD.	DATE
0	初版发行		

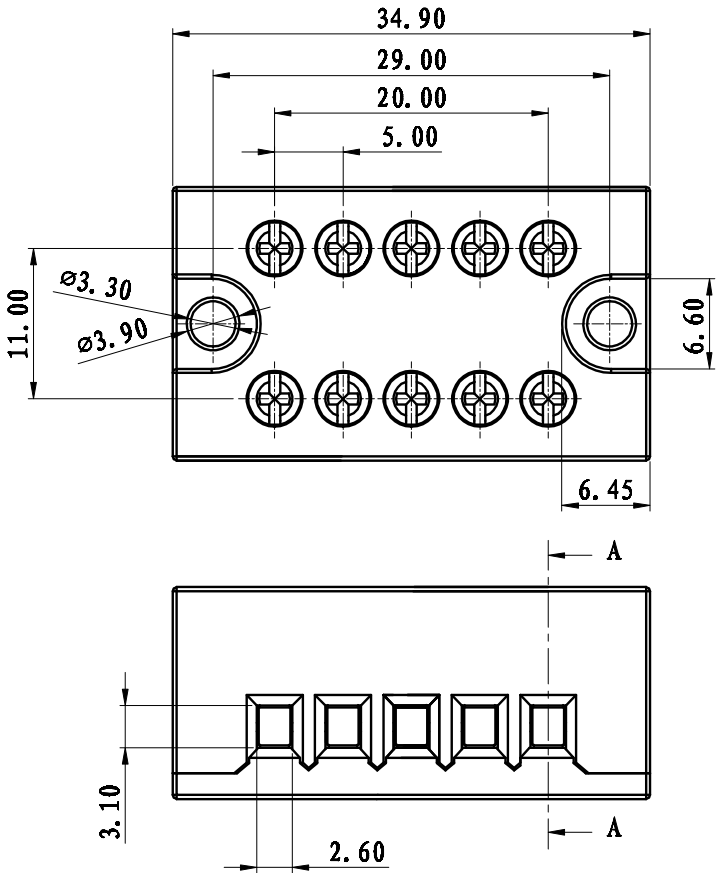


NOTES:

1. Voltage Rating: 300V, Current Rating: 15A
2. PITCH: 5.0mm
3. Insulation Withstands Voltage: AC2500V/min
4. Insulation Resistance: 500M  $\Omega$  or more at DC500V
5. Using Temperature Range: -40° C ~ +105° C
6. Suitable Electric Wire: 26-14AWG
7. Screw Torque Value: 0.5 N.m

技术要求:

- 1.额定电压: 300V, 额定电流: 15A
- 2.间距: 5.0mm
- 3.耐受电压值: AC 2500V/min
- 4.绝缘电阻: 500兆欧
- 5.使用条件: -40° C ~ +105° C
- 6.适用线规: 26-14AWG
- 7.螺丝扭力: 0.5 N.m



SECTION A-A

	pitch dimension			Nominal dimension					— /
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150	150 to 150	— /
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	LC1-5.08-铜方块	F1A0BLC5083V	2P	黄铜	镀镍
4	H3802螺丝(十字平头)	SPDFA305101V	2P	碳钢	三价铬钝化彩锌
3	H3802-导电件	4013B0010AV	P	黄铜	镀锡
2	H3802-盖板	4013C9101AV	1	PC	黑色
1	H3802-本体	4013A9101AV	1	PC	黑色
NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES
DES.	WYY	DATE	20/01/06	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
DWG NO.				SP-1-H380250	REV: V0
TITLE				H3802-5-1Y-00A	
				H3802-成品	