

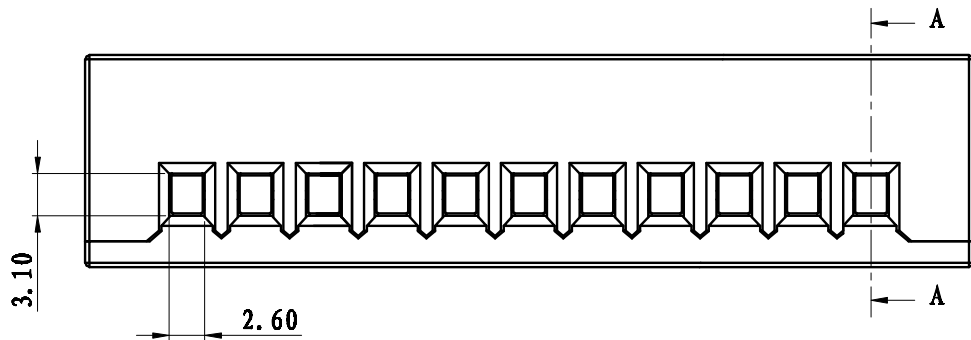


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行		

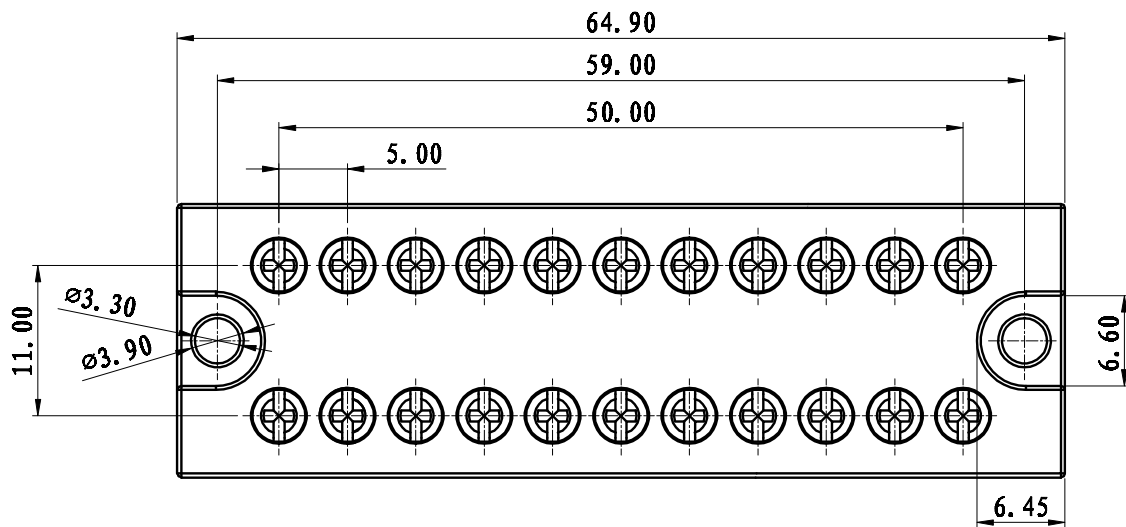

SECTION A-A


**NOTES:**

1. Voltage Rating: 300V, Current Rating: 15A
2. PITCH: 5.0mm
3. Insulation Withstands Voltage: AC2500V/min
4. Insulation Resistance: 500M Ω or more at DC500V
5. Using Temperature Range: -40° C ~ +105° C
6. Suitable Electric Wire: 26-14AWG
7. Screw Torque Value: 0.5 N.m

**技术要求:**

1. 额定电压: 300V, 额定电流: 15A
2. 间距: 5.0mm
3. 耐压电压: AC 2500V/min
4. 绝缘阻抗: 500兆欧
5. 使用条件: -40° C ~ +105° C
6. 适用线规: 26-14AWG
7. 螺丝扭力: 0.5 N.m

	pitch dimension			Nominal dimension					—
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		□ ○
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	LC1-5.08-铜方块	F1A0BLC5083V	2P	黄铜	镀镍		
4	H3802螺丝(十字平头)	SPDFA305101V	2P	碳钢	三价铬钝化彩锌		
3	H3802导电件	4013B0010AV	P	黄铜	镀锡		
2	H3802盖板	4013C9101AV	1	PC	黑色		
1	H3802本体	4013A9101AV	1	PC	黑色		
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES		
DES.	WY	DATE	20/01/06	UNITS	MM	THIRD ANGLE PROJECTION	SBBT
CHK.		DATE		SIZE	A4	1 of 1	
APP.		DATE		SCALE	1:1	DWG NO. SP-1-H380250	REV: Y0
 <b>上海联捷电气有限公司</b> Shanghai Hlinker Electric CO.,LTD						TITLE	H3802-11-1Y-00A H3802-成品