


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

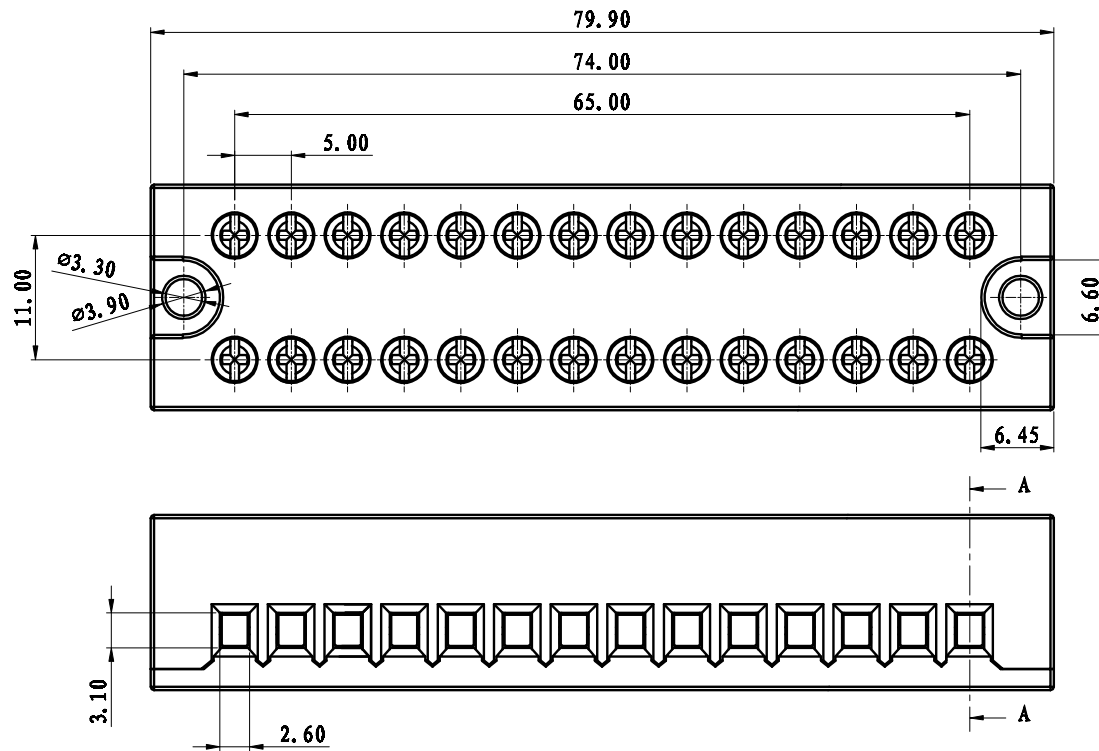


**NOTES:**

1. Voltage Rating: 300V, Current Rating: 15A
2. PITCH: 2.6mm
3. Insulation Withstands Voltage: AC250V/min
4. Insulation Resistance: 500M Ω or more at AC250V
5. Using Temperature Range: -40° C ~ +105° C
6. Suitable Electric Wire: 26-14AWG
7. Screw Torque Value: 0.5 N.m


**技术要求:**

- 1.额定电压: 300V, 额定电流: 15A
- 2.间距: 2.6mm
- 3.耐受电压: AC 250V/min
- 4.绝缘电阻: 500兆欧
- 5.使用条件: -40° C ~ +105° C
- 6.适用线径: 26-14AWG
- 7.扭矩值: 0.5 N.m



SECTION A-A

	pitch dimension			Nominal dimension					—
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		□ ○
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	LC1-1.00-制方法	FLANULCS003V	2P	黄铜	镀锌	
4	H3802螺母(十一号平头)	SP-W1305101V	2P	碳钢	三价铬钝化彩锌	
3	H3802导电件	401320010AV	P	黄铜	镀锡层	
2	H3802-盖板	4013C9101AV	1	PC	黑色	
1	H3802-本体	4013A9101AV	1	PC	黑色	
NO.	NAME OF PART		NO. OF PART	Q' TY	MATERIAL	NOTES
DES.	WY	DATE	20/01/06	UNITS	MM	THIRD ANGLE PROJECTION
CHK.		DATE		SIZE	A4	1 of 1
APP.		DATE		SCALE	1:1	REV: Y0
 <b>上海联捷电气有限公司</b> Shanghai Hlinker Electric CO.,LTD					TITLE	H3802-14-1Y-00A H3802-成品