

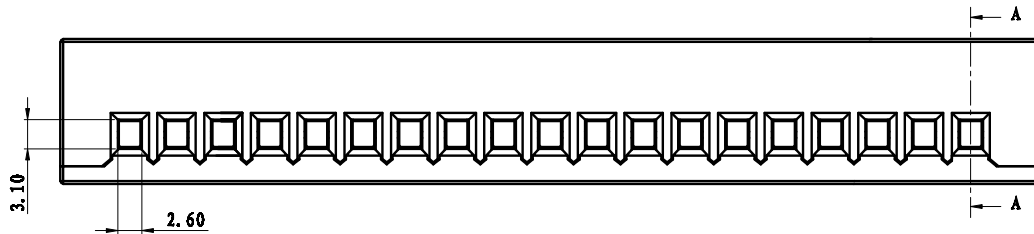


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行		

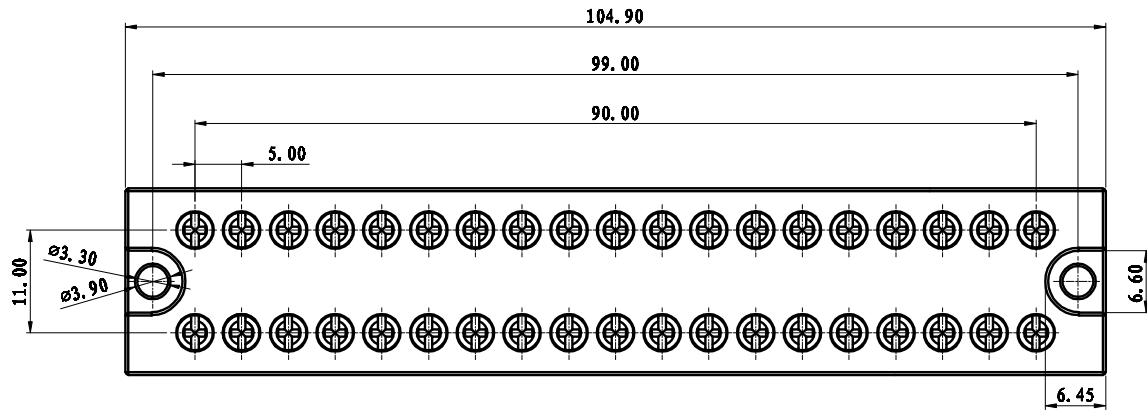

- NOTES:**
1. Voltage Rating: 300V, Current Rating: 15A
 2. FITED: 5.0mm
 3. Insulation Withstands Voltage: AC2500V/min
 4. Insulation Resistance: 500M Ω or more at DC500V
 5. Using Temperature Range: -40° C ~ +105° C
 6. Suitable Electric Wire: 26-34AWG
 7. Screw Torque Value: 0.5 N.m

- 技术要求:**
- 1.额定电压: 300V, 额定电流: 15A
 - 2.间距: 5.0mm
 - 3.耐受电压: AC 2500V/min
 - 4.绝缘电阻: 500兆欧
 - 5.使用条件: -40° C ~ +105° C
 - 6.适用线径: 26-34AWG
 - 7.扭矩值: 0.5 N.m



	pitch dimension			Nominal dimension					—
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		□ ○
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	LC1-5.08-铜方块	F1A0BLC5083V	2P	黄铜	镀锌		
4	H3802螺丝(十字平头)	SPDFA305101V	2P	碳钢	三价铬钝化彩锌		
3	H3802-导电件	4013B0010AV	P	黄铜	镀锡		
2	H3802-盖板	4013C9101AV	1	PC	黑色		
1	H3802-本体	4013A9101AV	1	PC	黑色		
NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES		
DES.	WYY	DATE	20/01/06	UNITS	MM	THIRD ANGLE PROJECTION	SHEET
CHK.		DATE		SIZE	A4	1 of 1	
APP.		DATE		SCALE	1:1	DWG NO.	SP-1-H380250
				上海联捷电气有限公司		H3802-19-1F-00A	
				Shanghai Hlinker Electric CO.,LTD		H3802-成品	