
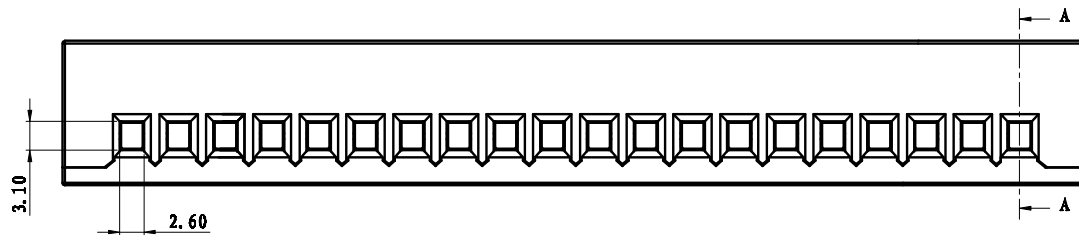



REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行		

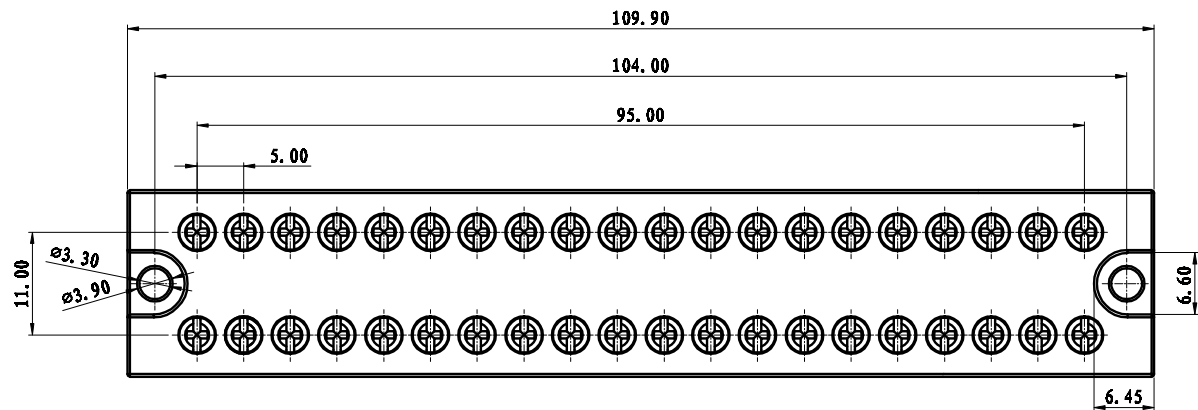

- NOTES:
1. Voltage Rating: 300V, Current Rating: 15A
  2. PITCH: 5.0mm
  3. Insulation Withstands Voltage: AC2500V/min
  4. Insulation Resistance: 50M Ω or more at DC500V
  5. Using Temperature Range: -40° C ~ +105° C
  6. Suitable Electric Wire: 26-14AWG
  7. Screw Torque Value: 0.5 N.m

技术要求:

- 1.额定电压: 300V, 额定电流: 15A
- 2.间距: 5.0mm
- 3.耐受电压: AC 2500V/min
- 4.绝缘电阻: 50MΩ
- 5.使用条件: -40° C ~ +105° C
- 6.适用线径: 26-14AWG
- 7.扭矩值: 0.5 N.m



	pitch dimension			Nominal dimension					—
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		□ ○
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	LC1-5.08-铜方块	F1A0MLCS003V	2P	铜制	镀镍		
4	H3802螺丝(十字平头)	SP0FA305101V	2P	碳钢	三价铬钝化彩锌		
3	H3802-导电件	401320010AV	P	铜制	镀锡层		
2	H3802-盖板	4013C9101AV	1	PC	黑色		
1	H3802-本体	4013A9101AV	1	PC	黑色		
NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES		
DES.	WY	DATE	20/01/06	UNITS	MM	THIRD ANGLE PROJECTION	SBBBT
CHK.		DATE		SIZE	A4	1 of 1	
APP.		DATE		SCALE	1:1	DWG NO.	SP-1-H380250
				<b>上海联捷电气有限公司</b> Shanghai Hiaker Electric CO.,LTD		TITLE	H3802-20-1Y-00A H3802-成品